BY APPOINTMENT TO
THE ROYAL DANISH COURT

CARL HANSEN & SØN



PRODUCT DATA SHEET


# HJW37 THE PENDANT

# HANS J. WEGNER

# HJW37 THE PENDANT

The HJW37 The Pendant was designed by Hans J. Wegner in 1962 and has been in production ever since. The pendant features an aluminium shade with a 24-carat gold- or nickel-plated hanger and extrudes a soft, warm light ideal to illuminate a dining- or coffee table. The design comprises several functional elements such as an optional lift and height adjustable socket to adapt the height of the lamp and the light bulb for glare free lighting. Its inherent versatility makes its suitable for both the living- and dining room.

## SPECIFICATIONS

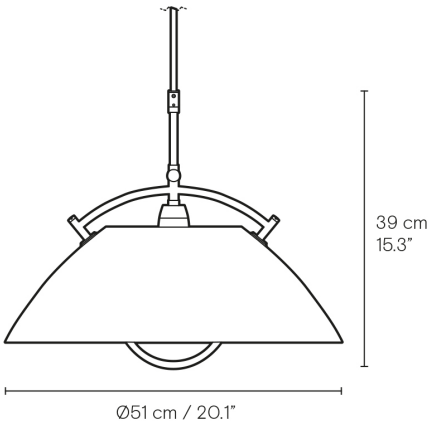


| Bulb | Dimmable function | Cord | Suspension | Ceiling canopy |
|---|---|---|---|---|
| Not included | None | 1,5m white cord for lamp w. lift<br>3m white cord for lamp wo. lift | Not included | A white canopy is included for lamps w. lift |

| Recommended light source | Socket | Max watt | Max voltage frequency | Electric shock protection | Ingress protection |
|---|---|---|---|---|---|
| Phillips LED: A60, 5W warm white | E27 | 16W | 220-240V/50-60HZ | Class II | IP20 |

| Packaging dimensions and weight | Height | Width | Cbm | Netto | Tara | Gross | Cartons |
|---|---|---|---|---|---|---|---|
| | 420 mm | 550 mm | 0.13 | 2.0 kg | 1.9 kg | 3.9 kg | 1/1 |

| Preassembled |
|---|
| Yes |

## MATERIALS

Shade: White or black painted aluminum

Hanger: Nickel plated

Shade: White or dark green painted aluminum

Hanger: 24 carat gold plated

## RECOMMENDED LIGHT SOURCE USED FOR MEASSUREMENTS

Phillips LED

A60 5W E27 220-240V

Warm white

4,5W = 40W


470 lumen

2700K




10,6 mm


## POLAR

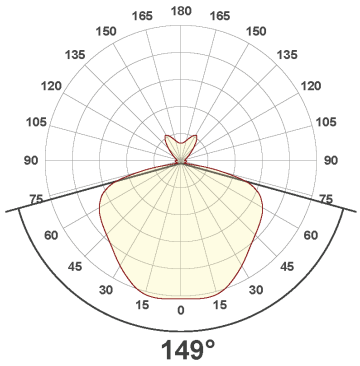


## FOOTCANDLES

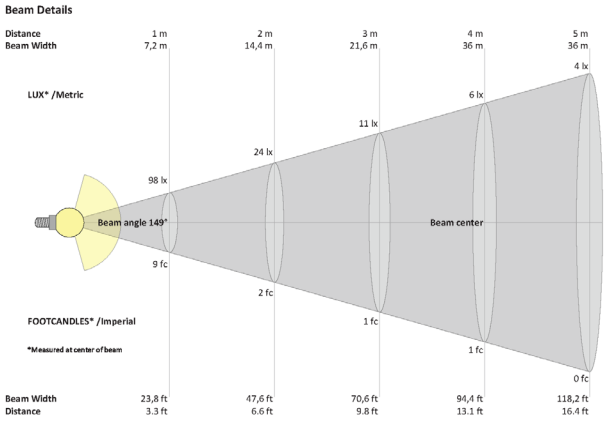



## ISO-LUX

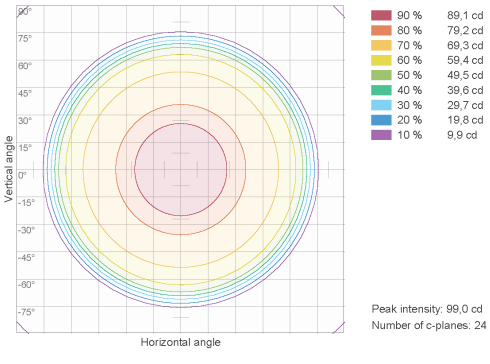


| | |
|---|---|
| 90 % | 89,1 cd |
| 80 % | 79,2 cd |
| 70 % | 69,3 cd |
| 60 % | 59,4 cd |
| 50 % | 49,5 cd |
| 40 % | 39,6 cd |
| 30 % | 29,7 cd |
| 20 % | 19,8 cd |
| 10 % | 9,9 cd |

Peak intensity: 99,0 cd
Number of c-planes: 24

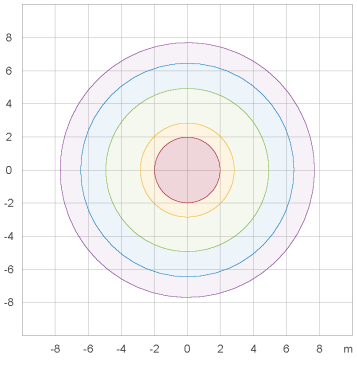


| | |
|---|---|
| 50,0 % | 5,4 lx |
| 30,0 % | 3,3 lx |
| 10,0 % | 1,1 lx |
| 5,0 % | 0,5 lx |
| 3,0 % | 0,3 lx |


Peak illuminance: 10,9 lx
Mounting height: 3,0 m
Number of c-planes: 24

UK CA


CE

LIFT INSTUCTIONS


1.

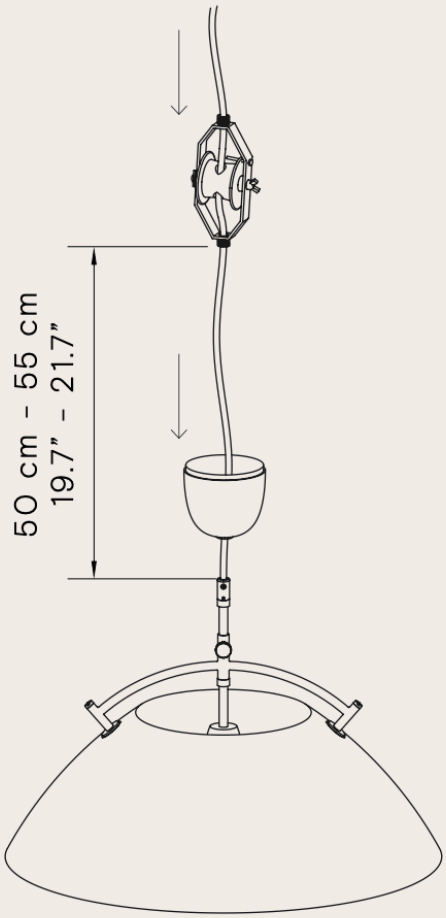



2-4.

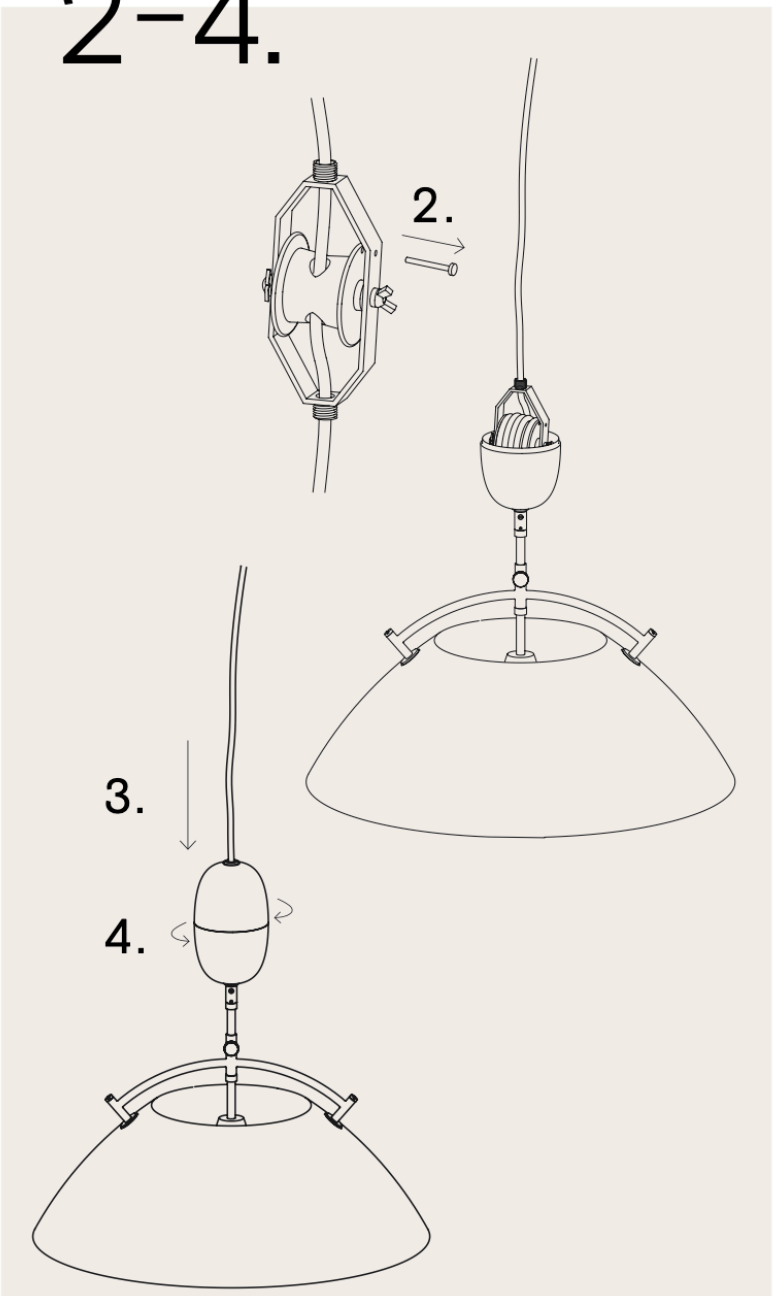

# 5.

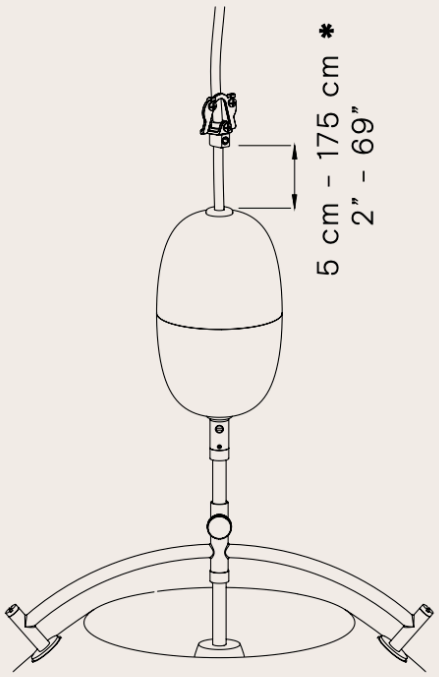

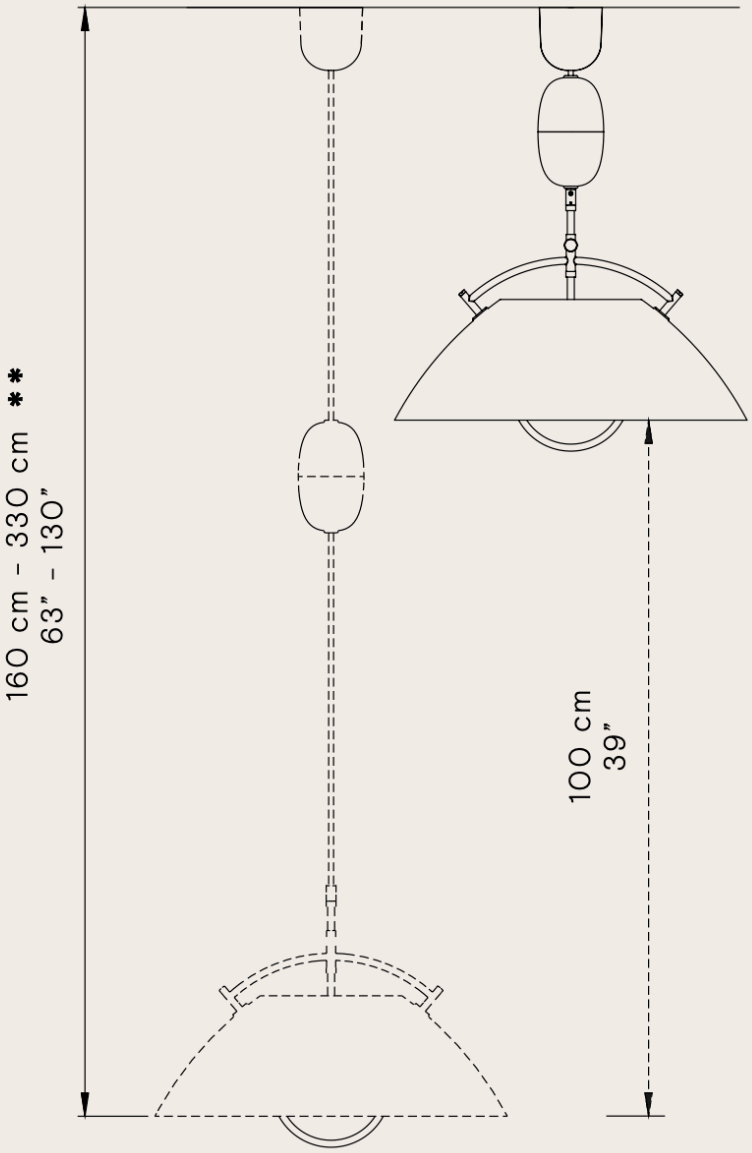
| * | | ** |
|---|---|---|
| 5 cm / 2” | → | 160 cm / 63” |
| 25 cm / 9.8” | → | 180 cm / 70.9” |
| 75 cm / 29.5” | → | 230 cm / 90.6” |
| 125 cm / 49.2” | → | 280 cm / 110.2” |
| 175 cm / 68.9” | → | 330 cm / 129.9” |